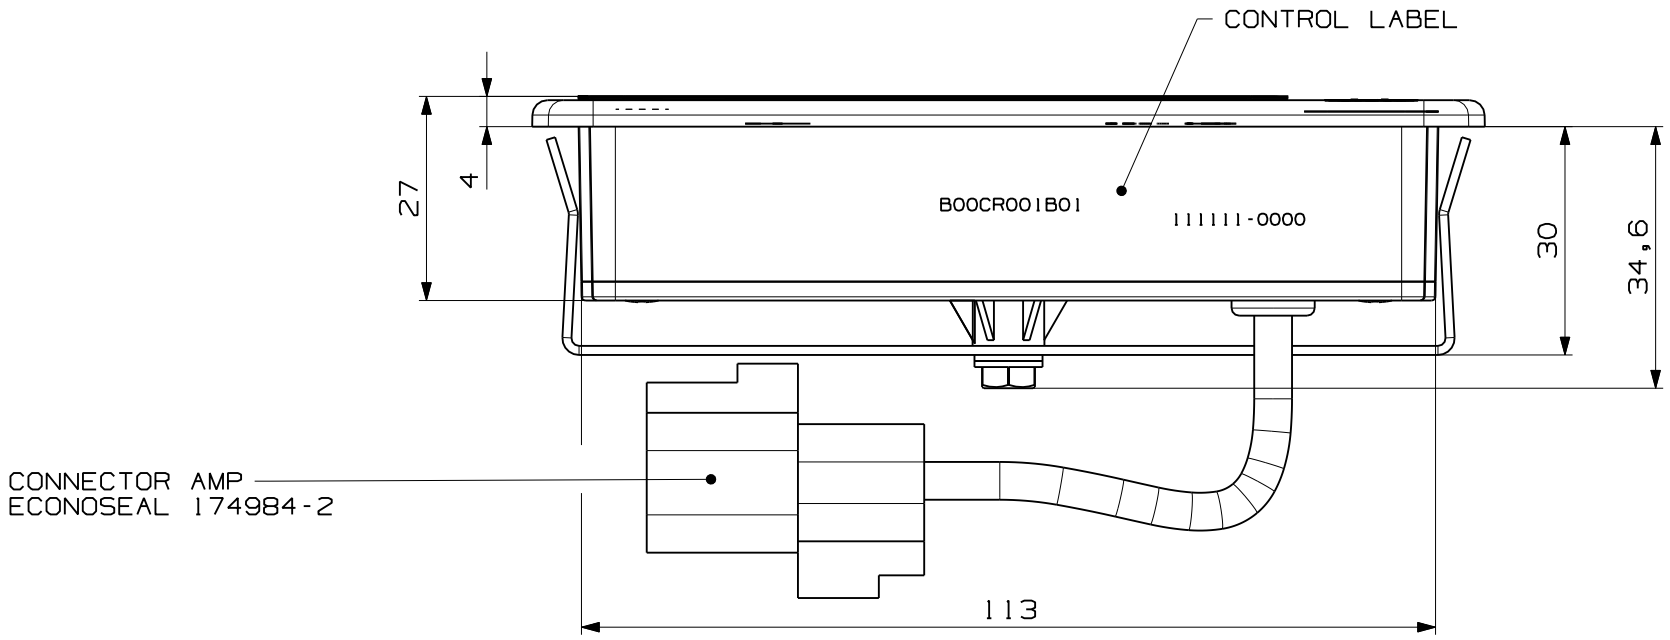

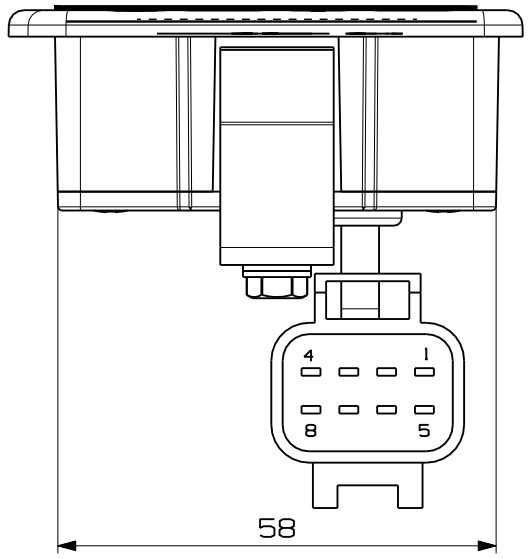

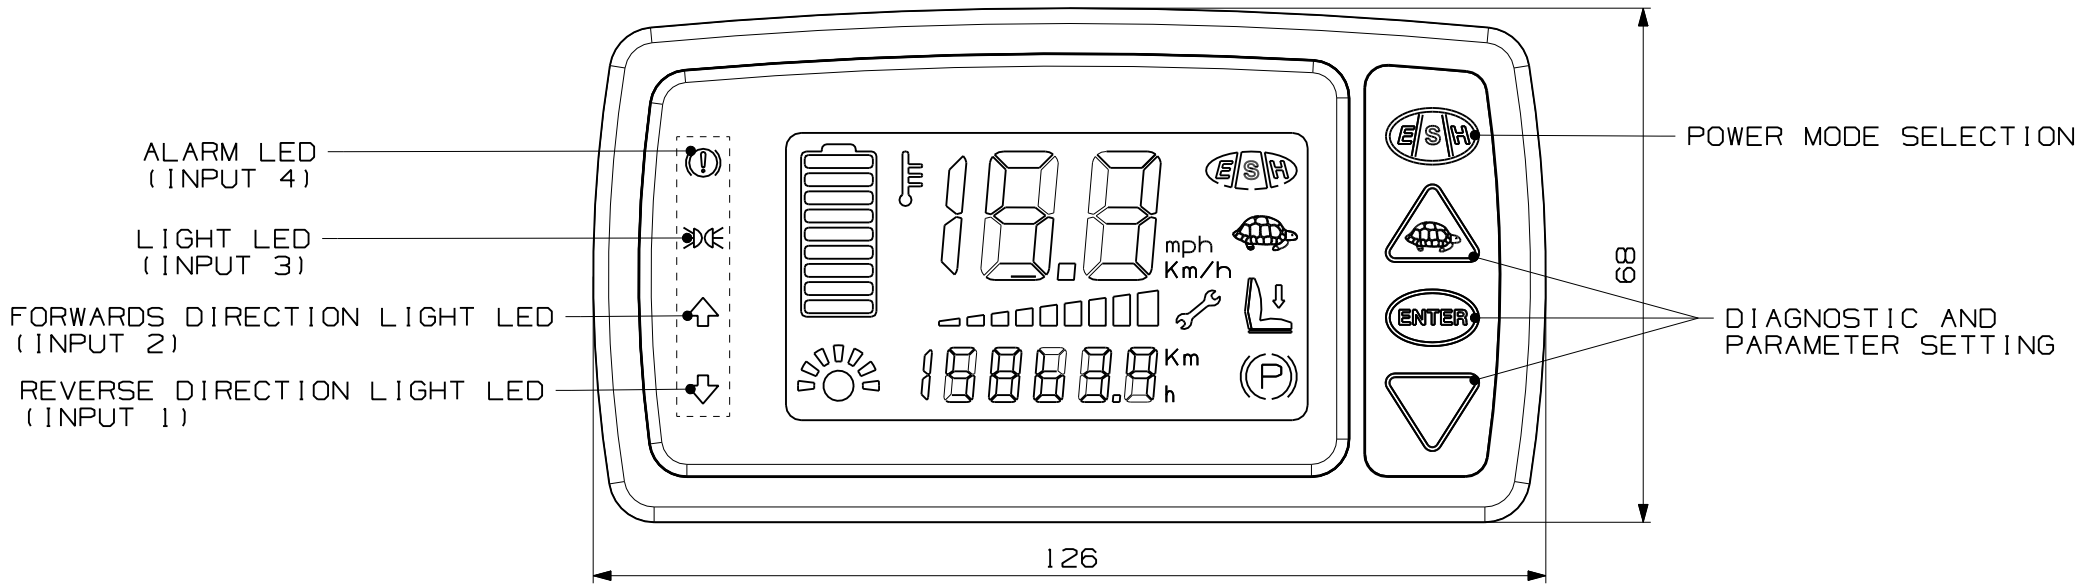

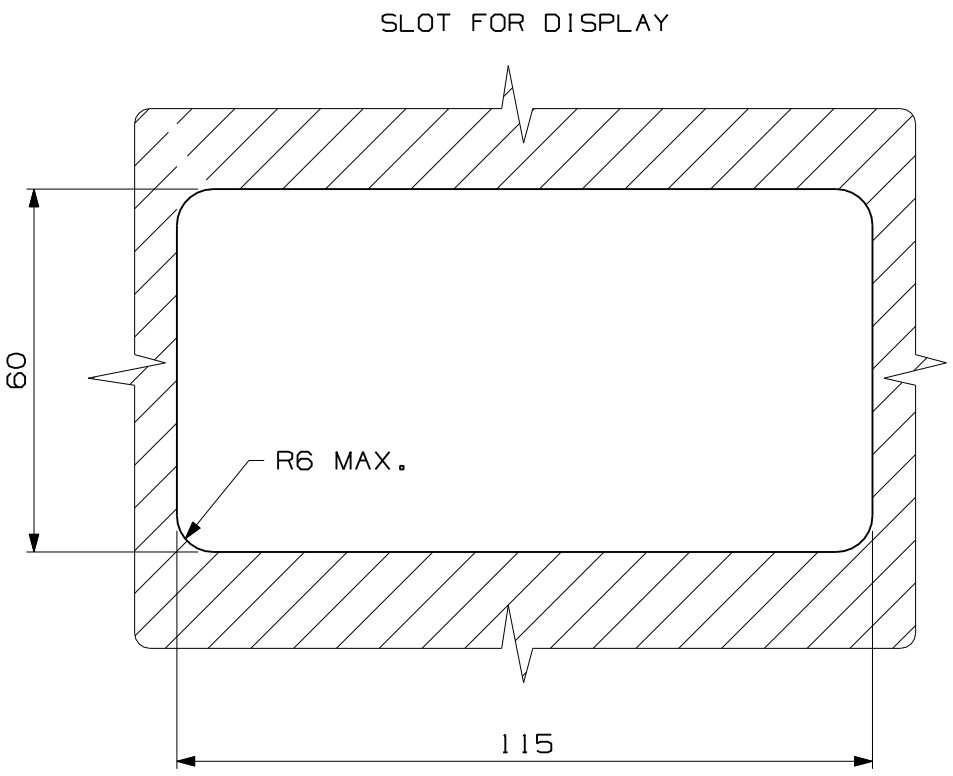

DISPLAY TYPE	TN AMBER
OPERATING VOLTAGE	+ 12V
SUPPLY CURRENT	150 mA MAX.
OPERATING TEMPERATURA	-30° C TO +50° C
PROTECTION	IP54
WEIGHT	0.14 Kg
TYPE CODE	E00CR017B00
SOFTWARE CODE	ASW000400
PRODUCT CODE	B00CR014B00

CONNECTIONS LIN-BUS	
1	INPUT 1
2	INPUT 2
3	INPUT 3
4	INPUT 4
5	LIN-BUS 19.2 Kbit/s
6	/
7	GND
8	+12V

All the sizes in mm.

Rev.	Modification	Date	Signature

Scale: 1:	MEDIUM LIMIT OF ACCURACY	UP TO 6	BESIDES 6 UP TO 30	BESIDES 30 UP TO 120	BESIDES 120 UP TO 315	BESIDES 315 UP TO 1000	BESIDES 1000 UP TO 2000	BESIDES 2000 UP TO 4000	REFERENCE MINOR ANGLE SIDE: UP TO 10	BESIDES 10 UP TO 50	BESIDES 50 UP TO 120	BESIDES 120 UP TO 400
	DEVIATION	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2	±1°	±0° 30'	±0° 20'	±0° 10'
	TOLERANCE	0,2	0,4	0,6	1	1,6	2,4	4	2°	1°	0° 40'	0° 20'

DRAWN WITH CAD HANDLING ON CAD SYSTEM ONLY

THIS DRAWING IS OUR EXCLUSIVE PROPERTY.
IT CAN NOT BE COPIED, REPRODUCED,
TRANSMITTED TO OTHER PEOPLE
OR USED IN ANY WAY WITHOUT OUR CONSENT.
ANY INFRINGEMENT WILL BE LEGALLY PURSUED.

SME

Drawn Peron
Approved Zulpo
Date 30/06/08

Replaces

Replaced

Name
DISPLAY COMPACT LIN-BUS
REACH-TRUCK

Code
CR014B

Sheet 1 of 2